Panel Mounts

Provides protection for equipment when leakage levels exceed 10mA. Ideal for equipment where mounting applications require panel or bulkhead mounting. Applications include:

- Testing Equipment
- Medical Equipment
- Appliances
- Copiers
- Electric Control Panels

Manual reset is required after GFCI trip. Remains reset on power restoration following disruption of primary power.



FEATURES

Model 24220

- Volts/Amps: 120V/20A or 240/16A
- Trip Level: 10 mA Typical

TECHNICAL DATA

Voltage range	85 - 264 VAC
Trip response time for ground fault	less than 25mS
Voltage surge withstand (MOV Protection)	3kv ringwave test and 4kv/2kA surge immunity test
Radio frequency noise susceptibility	operates within normal limits with 0.5 volts injected on power line 150-230 mHz
Frequency	50 / 60 Hz
Endurance	5,000 operations minimum
Overload Current	six times rated current
Operating temperature range	-10˚C to 50˚C
Effect of 10 Amp turn DC Shock on ground fault trip	5% maximum trip level variation
Insulation voltage	1500 VRMS - 1 Min.
Power On indication	mechanical indicator

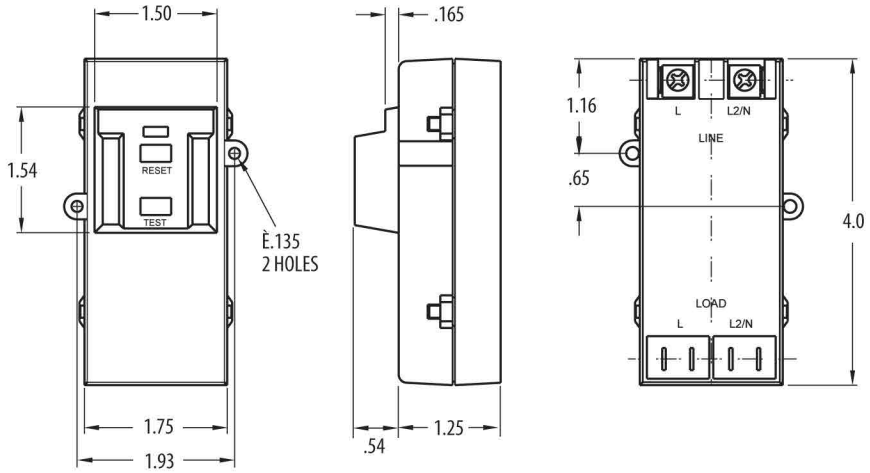

LIND EQUIPMENT
WORK CONFIDENTLY.
90B CENTURIAN DRIVE
MARKHAM, ON
L3R 8C4
P: (905) 475-5086 • F: (905) 475-4098 • www.lindequipment.net • info@lindequipment.net