RAC-15 GROUNDING ASSEMBLY DATASHEET

Eliminate tangled bonding and grounding assemblies that lie on the floor and present a tripping hazard. Coiled assemblies neatly and compactly retract out of the way when not in use. The coiled plated steel cable is bright orange PVC coated for high visibility.



Features

- Cast aluminum construction with two hardened stainless steel points.
- Industry-standard for bonding and grounding containers, drums, totes, and machinery.
- 55 lb spring pressure helps to ensure proper metal contact through paint and corrosion build-up.
- FM approved.
- Can take up to #6 cable.
- Clamp opens to 5/8".

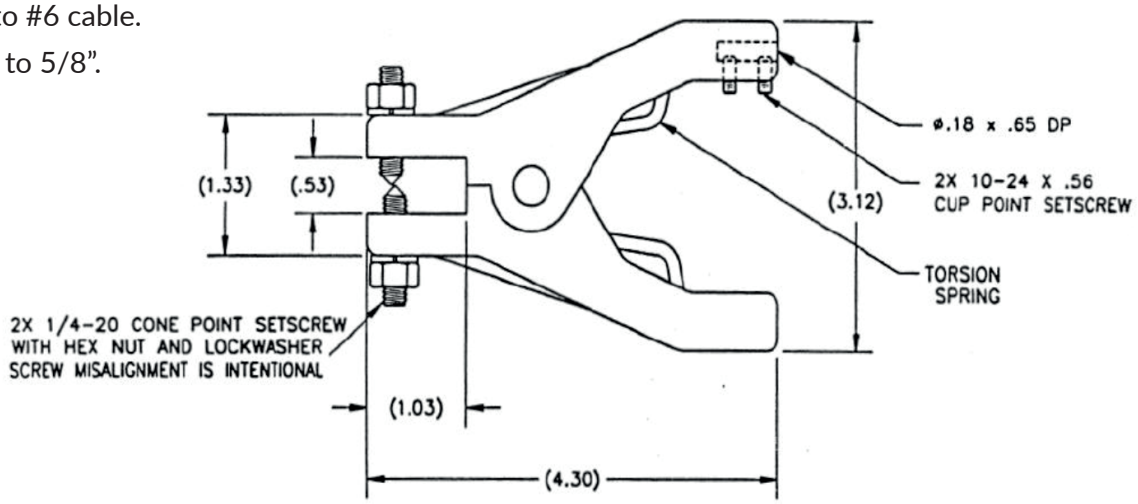

SPECIFICATIONS

Part Number	Lenght	Cable Size	Cable O.D	Termination 1	Termination 2
RAC-5	5'	1/8"	3/16"	REB Hand Clamp	5/16" Lug Terminal
RAC-10	10'	1/8"	3/16"	REB Hand Clamp	5/16" Lug Terminal
RAC-15	**15'**	**1/8"**	**3/16"**	**REB Hand Clamp**	**5/16" Lug Terminal**
RAC-1010	20'	1/8"	3/16"	REB Hand Clamp	5/16" Lug Terminal
RAC-30	30'	1/8"	3/16"	REB Hand Clamp	5/16" Lug Terminal
RAC-20	20'	3/16"	1/4"	GAT-P Alumimum Clamp	3/8" Lug Terminal
RAC-20B	20'	3/16"	1/4"	G40 Bronze Clamp	3/8" Lug Terminal