XP970LED XP FLOODLIGHT DATASHEET

Lind Equipment's **XP970LED** is a breakthrough in hazardous location lighting, delivering powerful illumination and rugged performance at a fraction of the usual cost. Designed for tough jobsite conditions, it features high-output LEDs in a durable, portable housing built for demanding work. The light comes standard with a 50ft cord and non-XP plug, with explosion-proof plug options and 100ft cord lengths available. Easily sourced replacement parts help maintain long-term reliability, making the XP970LED a practical and versatile solution for hazardous environments.



Features

- Easily portable.
- LEDs will last over 50,000 hours.
- No bulb replacement required.
- Rugged heavy-duty frame
- Safer working environment.
- Lower total cost of ownership.
- Reduced downtime on job sites.
- 90V - 277V input range.
- Approved to UL & CSA standards.

  **Certified for Class I, Division 1, Groups B, C, D & Class II, Division 1, Groups E, F, G*

OVERVIEW	
Part Number	XP970LED-50P
Description	40W LED Explosion-Proof Floodlight
Lumens	5,660 lumens
Amp Draw (@120V)	0.34A
Weight (light head)	17lbs
Cord	50ft 16/3 SOOW with NON-XP 5-15 plug
Construction	Cast aluminum housing with tempered glass lens
Mounting Options	Rugged adjustable bracket

Other Models

- **XP970LED-FS** – 40W LED explosion-proof floodlight with floor stand, 50ft cord and NON XP plug.
- **XP970LED-MAG** – 40W LED explosion-proof floodlight with magnet mount, 50ft cord and NON-XP plug.
- **XP970LED-TR** – 40W LED explosion-proof floodlight with 4ft-8ft tripod, 50ft cord and NON-XP plug
- **XP970LED-TD** – Dual 40W LED explosion-proof floodlights with 4ft-8ft tripod, 50ft cord and NON-XP plug

**Explosion-proof Appleton 5-15 plugs and 100ft cable lengths are available at request for the XP970LED series of floodlights.*

XP980LED XP FLOODLIGHT DATASHEET

Brighter and more powerful than the XP970LED, Lind Equipment's **XP980LED** delivers the same rugged, high-output performance with increased illumination for demanding hazardous locations. It retains the durability and portability of the smaller model while offering enhanced light output for tougher jobs. Standard units come with a 50ft cord and non-XP plug, with explosion-proof plug options and 100ft cords available. Easily sourced replacement parts ensure long-term reliability, making the XP980LED a versatile, cost-effective solution for large area hazardous work environments.

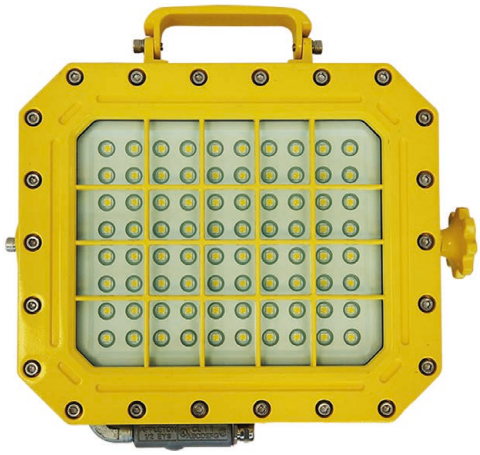

Features

- Easily portable.
- LEDs will last over 50,000 hours.
- No bulb replacement required.
- Rugged heavy-duty frame
- Safer working environment.
- Lower total cost of ownership.
- Reduced downtime on job sites.
- 90V - 277V input range.
- Approved to UL & CSA standards.

  **Certified for Class I, Division 1, Groups B, C, D & Class II, Division 1, Groups E, F, G*

Other Models

- **XP980LED-FS** – 160W LED explosion-proof floodlight with floor stand, 50ft cord and NON-XP plug.
- **XP980LED-TR** – 160W LED explosion-proof floodlight with 4ft-8ft heavy-duty tripod, 50ft cord and NON-XP plug

**Explosion-proof Appleton 5-15 plugs and 100ft cable lengths are available at request for the XP980LED series of floodlights.*

OVERVIEW	
Part Number	XP980LED-50P
Description	160W LED Explosion-Proof Floodlight
Lumens	24,000 lumens
Amp Draw (@120V)	1.34A
Weight (light head)	35lbs
Cord	50ft 16/3 SOOW with NON-XP 5-15 plug
Construction	Cast aluminum housing with tempered glass lens
Mounting Options	Rugged adjustable bracket